EFM560

External FaxModem 56K

INTRODUCTION

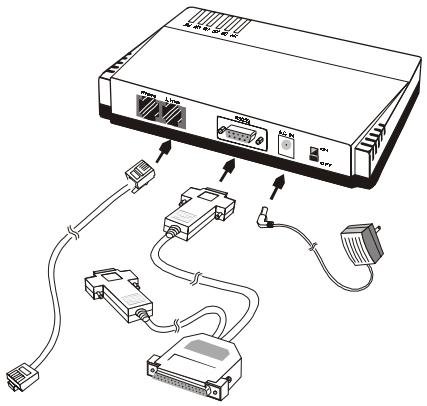

The External Fax Modem 56K is Bell, ITU-T (formerly CCITT) compliant and Hayes AT command compatible, so that it can be used worldwide with today's popular communication software programs. You will be able to send and receive faxes to/from any Group 3 compatible fax machine. Using standard phone lines, the data communication functions of the modem will enable you to successfully hook up to the Internet, transmit E-mail, send and receive information and communicate with other PCs, Bulletin Board Services (BBS) or computer networks such as Compuserve.

SPECIFICATIONS

Data

K56flex, V.90, V.34bis, V.34, V.32bis, V.32, V.22bis, V.22, and V.21, Bell 212A and Bell 103

Fax

V.17, V.29, V.27ter, and V.21 channel 2 Group 3 send and receive facsimile

Error Correction

V.42 and MNP 2-4

Data Compression

V.42bis and MNP 5

Communication software compatible commands

Hayes compatible enhanced "AT" command set
Fax Service Class 1 commands

Built-in DTE interface

DTE speed up to 115,200 bps
16C550 UART interface

SYSTEM REQUIREMENTS

- A telephone line with RJ-11 jack
- A free COM port
- A CD-ROM drive
- Windows 95/ 98/ 2000/Millennium or Windows NT pre-installed